


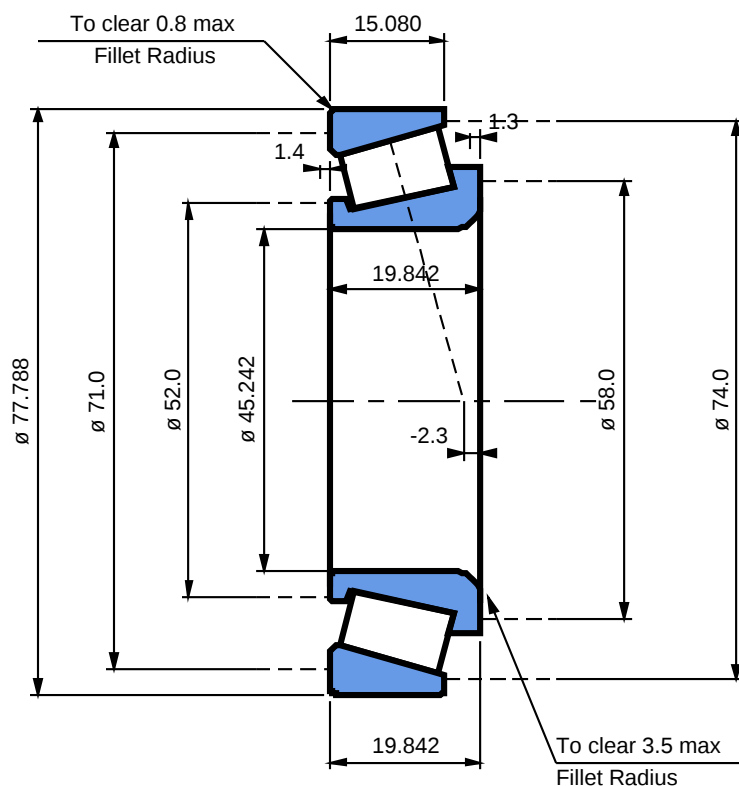

			SUPERSEDES			
Max Shaft Fillet Radius - R 3.5 mm Max Housing Fillet Radius - r 0.8 mm ISO Factor - e 0.43 ISO Factor - Y 1.41 Bearing Weight (with cage) 0.37 kg. Number of Rollers per Row 20 Effective Center a / Cone Back Face -2.3 mm			PROJECTION ORIGINAL SCALE 1 : 1		LM603049 - LM603011 TS BEARING ASSEMBLY K factor 1.37 Dynamic Radial Rating, C90 15500 N Dynamic Thrust Rating, Ca90 11300 N Static Radial Rating, C0 77900 N Radial Rating (1E6 Rev.), C1 59600 N	
			THE TIMKEN COMPANY CANTON, OHIO USA		DRAWN Timken.com KC_Engineering v1.0	
* COMPUTER GENERATED *			THIS DRAWING MUST NOT BE COPIED OR REPRODUCED WITHOUT THE CONSENT OF THE TIMKEN COMPANY		FOR DISCUSSION ONLY	